


**Husqvarna**<sup>®</sup>

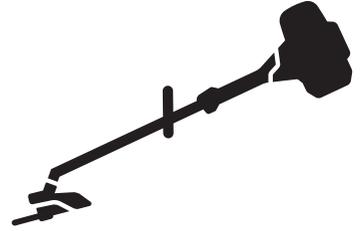

131R

# Contents


INTRODUCTION.....	2	TROUBLESHOOTING.....	18
SAFETY.....	4	TRANSPORTATION AND STORAGE.....	19
ASSEMBLY.....	8	TECHNICAL DATA.....	19
OPERATION.....	12	ACCESSORIES.....	21
MAINTENANCE.....	16		

## INTRODUCTION

### Operator's manual

The initial language of this operator's manual is English. Operator's manuals in other languages are translations from English.

### Product overview

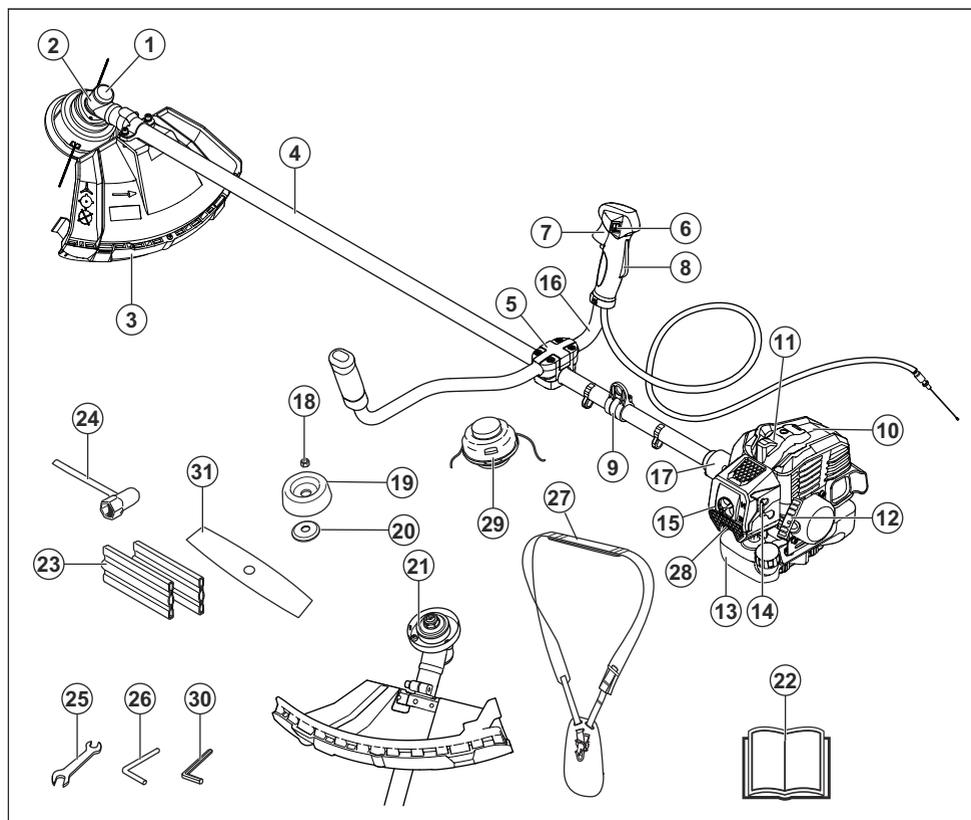

- 1. Grease filler cap, bevel gear
- 2. Bevel gear

- 3. Cutting attachment guard
- 4. Shaft

5. Handlebar clamp
6. Stop switch
7. Throttle trigger
8. Throttle trigger lockout
9. Suspension ring
10. Cylinder cover
11. Spark plug cap
12. Starter handle
13. Fuel tank
14. Choke control
15. Air filter cover
16. Handlebar
17. Clutch cover
18. Locking nut
19. Support cup
20. Support flange
21. Drive disc
22. Operator's manual
23. Transport guard
24. Socket spanner
25. Spanner
26. Locking pin
27. Harness
28. Air purge
29. Trimmer head
30. Allen key
31. 2-teeth blade

## Symbols on the product



**WARNING!** This product is dangerous. Injury or death can occur to the operator or bystanders if the product is not used carefully and correctly. To prevent injury to the operator or bystanders, read and obey all safety instructions in the operator's manual.



Please read the operator's manual carefully and make sure that you understand the instructions before use.



Use a protective helmet in locations where objects can fall on you. Use approved hearing protection. Use approved eye protection.



Use approved protective gloves.



Use heavy-duty slip-resistant boots.



The product can cause objects to eject, which can cause injury.



Maximum speed of the output shaft.



Keep a minimum of 15 m distance to persons and animals during operation of the product.



Risk of blade thrust if the cutting equipment touches an object that it does not immediately cut. The product can cut off body parts. Keep a minimum of 15 m distance to persons and animals during operation of the product.



Air purge bulb.



The direction to close the choke.



The direction to open the choke.



Keep all parts of your body away from the hot surfaces.



Noise emission to the environment refer to the European Community's Directive. The emission of the product is specified in the Technical data chapter and on the label.

The rating plate shows the serial number. **yyyy** is the production year, **ww** is the production week and **xxxxx** is the serial number.

**yyyywwxxxx**

**Note:** Other symbols/decals on the product refer to certification requirements for other commercial areas.

## Product liability

As referred to in the product liability laws, we are not liable for damages that our product causes if:

- the product is incorrectly repaired.
- the product is repaired with parts that are not from the manufacturer or not approved by the manufacturer.
- the product has an accessory that is not from the manufacturer or not approved by the manufacturer.

- the product is not repaired at an approved service center or by an approved authority.

---

## SAFETY

---

### Safety definitions

The definitions below give the level of severity for each signal word.



**WARNING:** Injury to persons.



**CAUTION:** Damage to the product.

---

**Note:** This information makes the product easier to use.

---

### General safety instructions

- Use the product correctly. Injury or death is a possible result of incorrect use. Only use the product for the tasks found in this manual. Do not use the product for other tasks.
  - Obey the instructions in this manual. Obey the safety symbols and the safety instructions. If the operator does not obey the instructions and the symbols, injury, damage or death is a possible result.
  - Do not discard this manual. Use the instructions to assemble, to operate and to keep your product in good condition. Use the instructions for correct installation of attachments and accessories. Only use approved attachments and accessories.
  - Do not use a damaged product. Obey the maintenance schedule. Only do the maintenance work that you find an instruction about in this manual. An approved service center must do all other maintenance work.
  - This manual cannot include all situations that can occur when you use the product. Be careful and use your common sense. Do not operate the product or do maintenance on the product if you are not sure about the situation. Speak to a product expert, your dealer, service agent or approved service center for information.
  - Disconnect the spark plug cable before you assemble the product, put the product into storage or do maintenance.
  - Do not use the product if it is changed from its initial specification. Do not change a part of the product without approval from the manufacturer. Only use parts approved by the manufacturer. Injury or death is a possible result of incorrect maintenance.
  - Do not breathe in the fumes from the engine. Long-term inhalation of the engine's exhaust fumes is a health risk.
- Do not start the product indoors or near flammable material. The exhaust fumes are hot and can contain a spark which can start a fire. Not sufficient airflow can cause injury or death because of asphyxiation or carbon monoxide.
  - When you use this product the engine makes an electromagnetic field. The electromagnetic field can cause damage to medical implants. Speak to your physician and medical implant manufacturer before you operate the product.
  - Do not let a child operate the product. Do not let a person without knowledge of the instructions operate the product.
  - Make sure that you always monitor a person, with decreased physical capacity or mental capacity, that uses the product. A responsible adult must be there at all times.
  - Lock the product in an area that children and unapproved persons cannot access.
  - The product can eject objects and cause injuries. Obey the safety instructions to decrease the risk of injury or death.
  - Do not go away from the product when the engine is on.
  - The operator of the product is responsible if an accident occurs.
  - Make sure that parts are not damaged before you use the product.
  - Make sure that you are at minimum 15 m (50 ft) away from other persons or animals before you use the product. Make sure that persons in the adjacent area know that you will use the product.
  - Refer to national or local laws. They can prevent or decrease the operation of the product in some conditions.
  - Do not use the product if you are fatigued or influenced by alcohol, drugs or medicine. They can have effects on your vision, alertness, coordination or judgment.

### Safety instructions for operation

- Make sure the product is fully assembled before you use it.
- Before a start, move the product 3 m (10 ft) away from the position where you filled the fuel tank. Put the product on a flat surface. Make sure that the cutting attachment does not touch the ground or other objects.
- The product can cause objects to eject, which can cause damage to the eyes. Always use an approved eye protection when you operate the product.
- Be careful, a child can come near the product without your knowledge during operation.

- Do not operate the product if there are persons in the work area. Stop the product if a person goes into the work area.
- Make sure that you are always in control of the product.
- Do not use the product if you cannot receive aid if an accident occurs. Always make sure others know you will operate the product before you start to operate the product.
- Do not turn with the product before you make sure that no persons or animals are in the safety area.
- Remove all unwanted materials from the work area before you start. If the cutting attachment hits an object, the object can eject and cause injury or damage. Unwanted material can wind around the cutting attachment and cause damage.
- Do not use the product in bad weather (fog, rain, strong winds, risk of lightning or other weather conditions.). Dangerous conditions (such as slippery surfaces) can occur because of bad weather.
- Make sure that you can move freely and work in a stable position.



- Make sure that you cannot fall when you use the product. Do not tilt when you operate the product.
- Always hold the product with your two hands. Hold the product on the right side of your body.



- Operate the product with the cutting attachment below your waist.
- If the choke control is in the choke position when the engine starts, the cutting attachment starts to turn.
- Do not touch the bevel gear after the engine stops. The bevel gear is hot after the engine stops. Hot areas can cause injury.
- Stop the engine before you move the product.
- Do not put down the product with the engine on.
- Before you remove the unwanted materials from the product, stop the engine and wait until the cutting

attachment stops. Let the cutting attachment stop before you or an aid remove the cut material.

## Personal protective equipment

- Always use correct personal protective equipment when you operate the product. The personal protective equipment does not erase the risk of injury. The personal protective equipment decreases the grade of injury if an accident occurs.
- Always use an approved eye protection while you operate the product.
- Do not operate the product with bare feet or with open shoes. Always use heavy-duty slip-resistant boots.
- Use heavy, long pants.
- If it is necessary, use approved protective gloves.
- Use a helmet if it is possible that objects fall on your head.
- Always use approved ear protection while you operate the product. Noise for a long period can cause noise-induced hearing loss.
- Make sure that you have a first aid kit near.

## Protective devices on the product


- Make sure that you regularly do the maintenance to the product.
  - The life of the product increases.
  - The risk of accidents decreases.

Let an approved dealer or an approved service center regularly examine the product to do adjustments or repairs.

- Do not use a product with damaged protective equipment. If the product is damaged, speak to an approved service center.


## Throttle trigger lockout

The throttle trigger lockout (A) prevents accidental operation of the throttle trigger (B). Push the throttle trigger lockout (A) to release the throttle trigger (B). When you release the handle, the throttle trigger lockout (A) and the throttle trigger (B) go back to their initial positions.

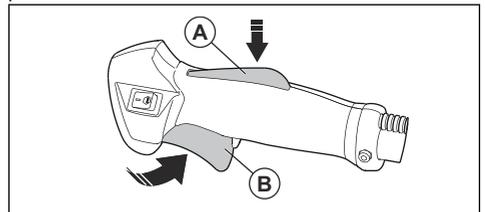


Two isolated return springs control this movement. This means that the throttle trigger (B) is automatically locked at the idle position.


1. Make sure that the throttle trigger (B) is locked at idle when you release the throttle trigger lockout (A).

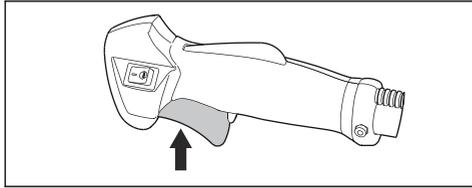


2. Push the throttle trigger lockout (A) and make sure that it goes back to its initial position when you release it.

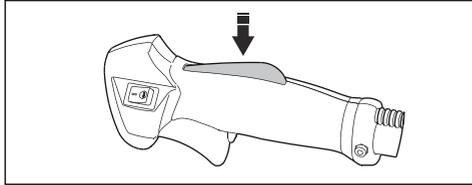

3. Push the throttle trigger (B) and make sure that it goes back to its initial position when you release it.

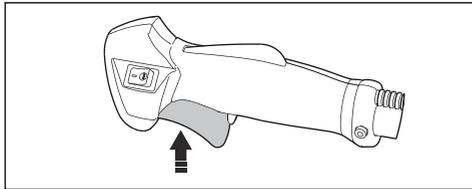


Start the engine, and then apply full throttle. Release the throttle trigger (B) and examine if the cutting attachment stops. If the cutting attachment turns with the throttle in the idle position, examine the idle adjustment screw of the carburetor.

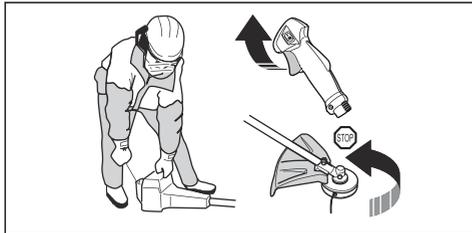


### Stop switch

Start the engine. Make sure that the engine stops when you move the stop switch to the stop position.

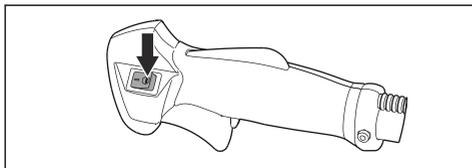

### Cutting attachment guard

The cutting attachment guard prevents a loose object to eject in the direction of the operator. The guard also prevents the operator from accidentally touching the cutting attachment.

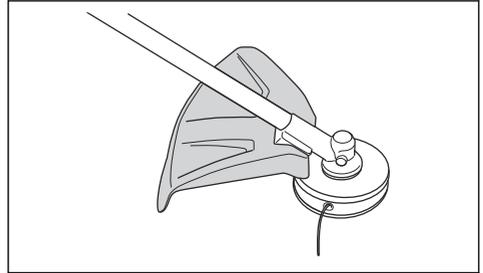

Examine the cutting attachment guard for damage and cracks. Replace if it is damaged or has cracks. Only use the approved guard for the cutting attachment.




**WARNING:** Do not use a cutting attachment without an approved guard. If an incorrect or defective guard is installed, this can cause damage to persons.

### Harness quick release




**WARNING:** Do not use the harness if the harness quick release (A) is defective. Make sure that the harness quick release operates correctly after you adjust the product and the harness.

The harness quick release (A) is at the front of the product. The harness straps must always stay at the correct position. In an emergency, the harness quick release helps you to safely release from the product.

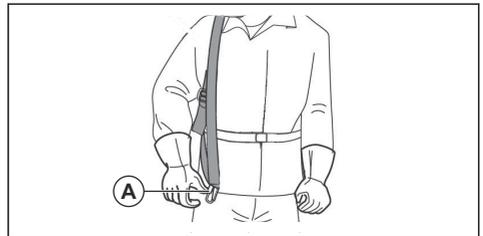

## Muffler

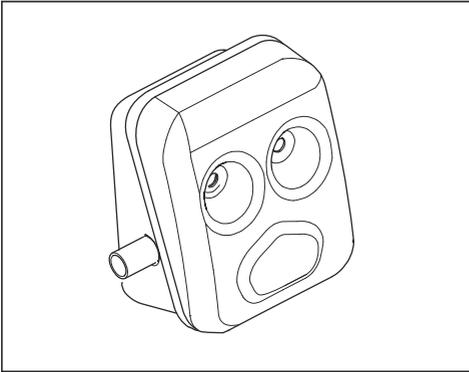

The muffler keeps the noise level to a minimum and keeps exhaust fumes away from the operator.

- Do not use an engine with a damaged muffler. A damaged muffler increases the noise level and the risk of fire. Keep a fire extinguisher near.
- Examine regularly that the muffler is attached to the product.
- Do not touch the engine or the muffler when the engine is on. Do not touch the engine or the muffler for a while after the engine stops. Hot surfaces can cause injuries.
- A hot muffler can cause a fire. Be careful, if you use the product near flammable liquids or fumes.
- Do not touch the parts in the muffler, if the muffler is damaged. The parts can contain some carcinogenic chemicals.

## To attach and remove the locknut




**WARNING:** Stop the engine, use protective gloves and be careful around the sharp edges of the cutting attachment.

A locknut is used to attach some types of cutting attachments. The locknut has a left thread.

- To attach, tighten the locknut in the opposite direction to the direction of turning of the cutting attachment.
- To remove the locknut, loosen the locknut in the same direction as the cutting attachment rotates.

- To loosen and tighten the locknut, use a socket wrench with a long shaft. The arrow in the picture shows the area where you can operate the socket wrench.

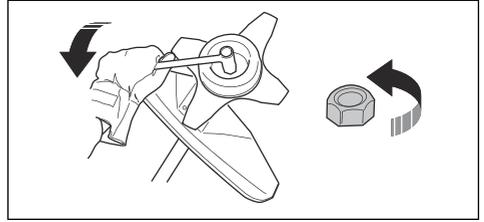

**WARNING:** When you loosen and tighten the locknut, there is a risk of injury from the blade. You must always make sure that the blade guard prevents injury to your hand when you do this.


**Note:** Make sure that you can not turn the locknut by hand. Replace the nut if the nylon lining does not have a resistance of a minimum of 1.5 Nm. The locknut must be replaced after it has been put on approximately 10 times.

## Cutting attachment


- Do the regular maintenance. Let an approved service center regularly examine the cutting attachment to do adjustments or repairs.
  - The performance of the cutting attachment increases.
  - The life of the cutting attachment increases.
  - The risk of accidents decreases.
- Only use an approved cutting attachment guard. For more information, see *ACCESSORIES on page 21*.
- Do not use a damaged cutting attachment.

## Cutting equipment

- Use the blades and grass knives to cut coarse grass.

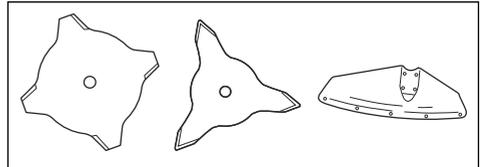


- Use the trimmer head to cut grass.

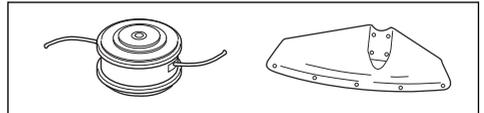

- An incorrectly sharpened or damaged blade increases the risk of accidents. Keep the teeth of the blade correctly sharpened. Follow the instructions in

To sharpen grass cutters and grass blades on page 18 and use the recommended file gauge.

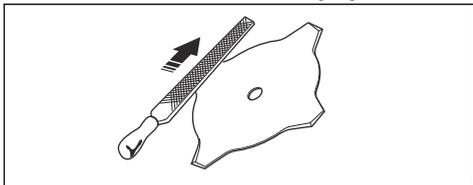

- Examine the cutting attachment for damage and cracks. Replace the damaged cutting attachment.
- Only use cutting attachments with recommended guards. See *ACCESSORIES* on page 21.

### Trimmer head



**WARNING:** Always make sure the trimmer line is wound tightly and evenly around the drum to prevent harmful vibration.



- Only use recommended trimmer heads and trimmer lines.
- Only use recommended cutting attachments.
- Smaller machines requires small trimmer heads and vice versa.
- The length of the trimmer line is important. A longer trimmer line requires greater engine power than a shorter trimmer line of the same diameter.
- Make sure that the cutter on the trimmer guard is intact. This cuts the trimmer line to the correct length.
- Soak the trimmer line in water for a couple of days before use to increase the life length.

### Fuel safety

- Do not start the product if there is fuel or engine oil on the product. Remove the unwanted fuel/oil and let the product dry. Remove unwanted fuel from the product.
- If you spill fuel on your clothing, change clothing immediately.

- Do not get fuel on your body, it can cause injury. If you get fuel on your body, use a soap and water to remove the fuel.
- Do not start the engine if you spill oil or fuel on the product or on your body.
- Do not start the product if the engine has a leak. Examine the engine for leaks regularly.
- Be careful with fuel. Fuel is flammable and the fumes are explosive and can cause injuries or death.
- Do not breathe in the fuel fumes, it can cause injury. Make sure that there is a sufficient airflow.
- Do not smoke near the fuel or the engine.
- Do not put warm objects near the fuel or the engine.
- Do not add the fuel when the engine is on.
- Make sure that the engine is cool before you refuel.
- Before you refuel, open the fuel tank cap slowly and release the pressure carefully.
- Do not add fuel to the engine in an indoor area. Not sufficient airflow can cause injury or death because of asphyxiation or carbon monoxide.
- Tighten the fuel tank cap carefully or a fire can occur.
- Move the product at a minimum of 3 m (10 ft) from the position where you filled the tank before a start.
- Do not put too much fuel in the fuel tank.
- Make sure that a leak cannot occur when you move the product or fuel container.
- Do not put the product or a fuel container where there is an open flame, spark or pilot light. Make sure that the storage area does not contain an open flame.
- Only use approved containers when you move the fuel or put the fuel into storage.
- Empty the fuel tank before long-term storage. Obey the local law on where to dispose fuel.
- Clean the product before long-term storage.
- Remove the spark plug cable before you put the product into storage to make sure that the engine does not start accidentally.

### Safety instructions for maintenance

- If you cannot adjust the idle speed to make the cutting attachment stop, speak to your service center. Do not use the product until the product is correctly adjusted or repaired.

---

## ASSEMBLY


---



**WARNING:** Read the safety chapter before you assemble the product.


## To install the main body

1. Connect the engine (A) to the tube (B) with four screws (C).

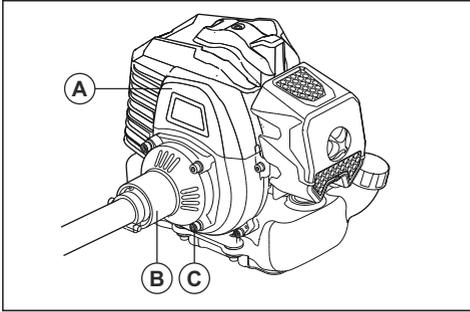


## To install the handlebar and throttle

1. Install the handlebar in the handlebar clamp on the shaft.

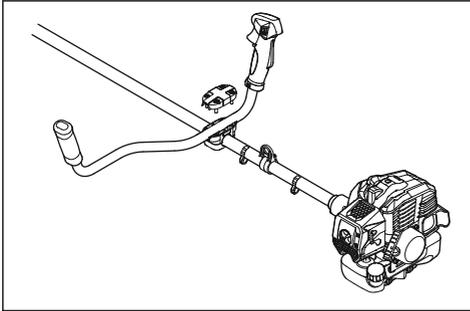

2. Put on the harness and hang the product from the support hook.
3. Make a last adjustment to make sure the product is in a comfortable position when it hangs from the harness.

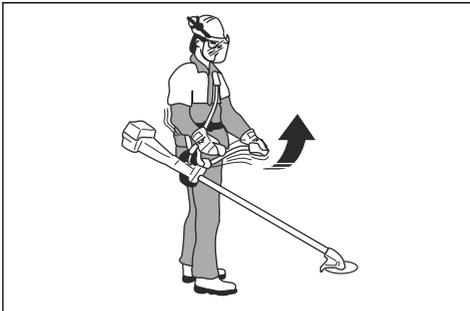


4. Tighten the screws.


## To connect the throttle cable and stop switch wires

1. Remove the air filter cover.


2. Install the throttle cable (A) through the carburettor bracket (B).

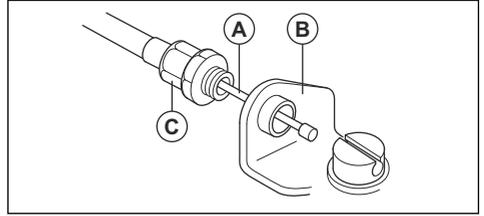

3. Turn the cable adjuster sleeve (C) into the carburettor bracket fully.
4. Put the slot fitting (D) on the carburettor. At this time, the recessed hole (E) for the cable lug (F) is away from the cable adjuster sleeve (C).

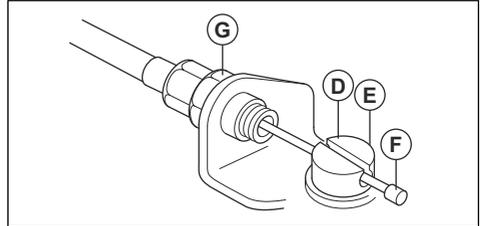


5. Rotate the carburettor throttle cam and move the throttle cable (A) through the slot in the slot fitting.
6. Make sure the cable lug (F) drops into the recessed hole.
7. Operate the throttle trigger some times to make sure that it operates correctly.
8. Adjust the cable adjuster sleeve (C).
  - a) Make sure the stop on the carburettor throttle cam touches the throttle stop correctly.
  - b) Make sure the cable position keeps 1-2 mm between cable lug (F) and slot fitting when the throttle trigger is fully pushed.

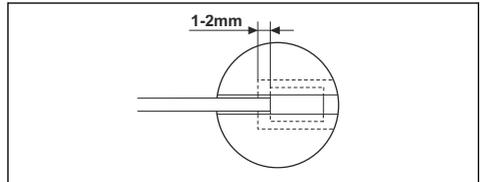

9. When the throttle cable (A) is adjusted correctly, tighten the locknut (G).

- Connect the stop switch wires (H) with the connectors from the engine.

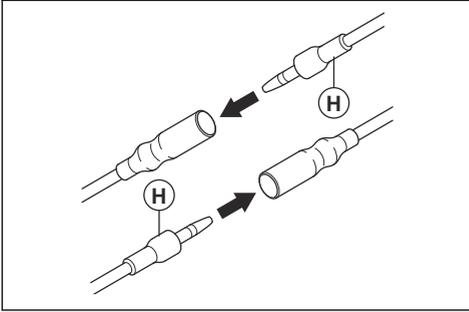

- Install the air filter cover.

## To install the blade guard, grass blade and grass cutter




**CAUTION:** Only use the approved guard for the blades. See *ACCESSORIES* on page 21.




**CAUTION:** Make sure that the guard extension is removed.

- Attach the blade guard/cutting attachment guard (A) onto the shaft and tighten with the bolts (L).

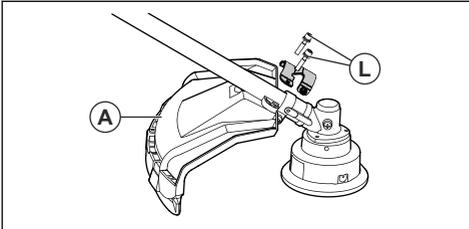

- Install the drive disc (B) on the output shaft.
- Turn the output shaft until one of the holes in the drive disc aligns with the related hole in the gear housing.
- Put the locking pin in the hole to lock the shaft.
- Put the blade (C), support flange (E) and support cup (D) on the output shaft.
- Put the support cup (D) on the output shaft with the not flat side against the blade.

- Install the nut (F). Hold the shaft of the wrench near the blade guard as much as possible. To tighten the nut, you must turn the wrench in the opposite direction of rotation. Tighten the nut to a torque of 35-50 Nm (3.5-5 kpm).

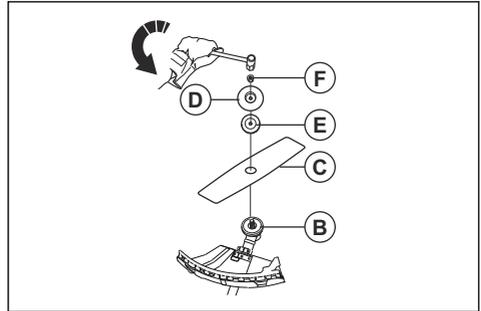

**Note:** Left hand thread.

## To install blades and trimmer heads



**WARNING:** Only use the approved guard for the blades. See *ACCESSORIES* on page 21. A defective guard can cause injury.




**WARNING:** If you operate the product with a grass blade, first install the correct handlebar, blade guard and harness .




**WARNING:** If you do not install the the blades correctly, it can cause injury.

- Make sure that the lifted section on the drive disc/ support flange engages correctly in the center hole of the blades.
- Install the blades.

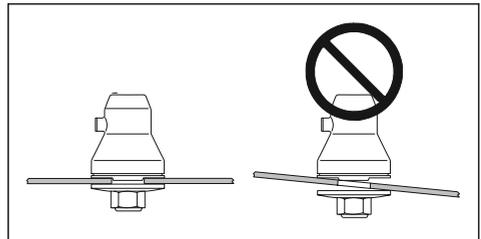


## To attach the cutting attachment guard and the trimmer head

1. Attach the guard (A) to the shaft and tighten with the bolt (L). Make sure to use the correct guard for the correct trimmer head.

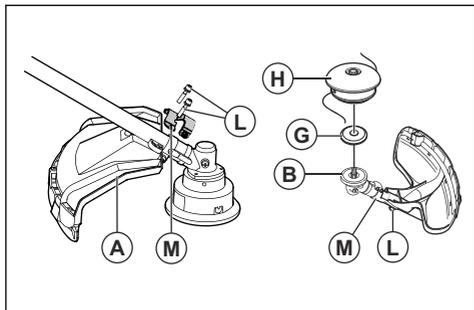


2. Attach the drive disc (B) to the output shaft.
3. Turn the output shaft until the hole in the drive disc aligns with the hole in the gear housing.
4. Put the locking pin in the hole to lock the shaft. Put "G" on the shaft.
5. Turn the trimmer head (H) counterclockwise.

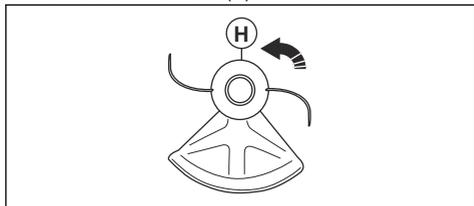

6. To disassemble, do the reverse procedure.

## To install the 2-teeth blade in the guard

1. Install the blade in the transport guard.

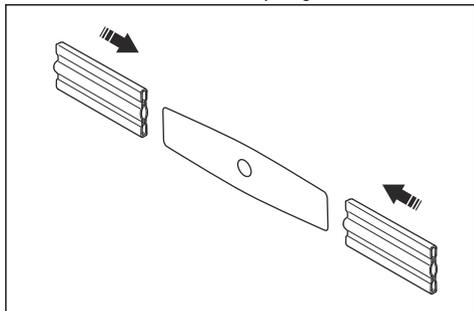

## To adjust the harness



**WARNING:** Always attach this product to the harness correctly. If not, you cannot control the product safely and this can result in injury to you or others. Do not use a harness with a defective quick release.




**WARNING:** Use the harness quick release function if you must release from the product and the harness in an emergency situation.

1. Put on the harness.
2. Adjust the harness for the best work position.
3. Adjust the side straps until the weight is equally applied across your shoulders.



4. Adjust the harness until the cutting attachment is parallel to the ground.

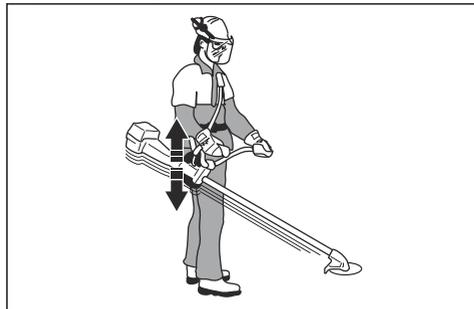

5. Let the cutting attachment stay lightly on the ground. Adjust the harness clamp to balance the product correctly.

# OPERATION



**WARNING:** Read and understand the safety chapter before you operate the product.

## Fuel

### To use fuel



**CAUTION:** This product has a two-cycle engine. Use a mixture of gasoline and two-cycle engine oil. Make sure to use the correct quantity of oil in the mixture. Incorrect ratio of gasoline and oil can cause damage to the engine.

### Gasoline



**CAUTION:** Do not use gasoline with an octane number less than 90 RON (87 AKI). This can cause damage to the product.



**CAUTION:** Do not use gasoline with more than 10% ethanol concentration (E10). This can cause damage to the product.

- Always use new unleaded gasoline with a minimum octane number of 90 RON (87 AKI) and with less than 10% ethanol concentration (E10).
- Use gasoline with a higher octane number if you frequently use the product at continuously high engine speed.

### Two-cycle engine oil

- Use only the two-cycle engine oil of high quality, especially HUSQVARNA two-cycle oil. Use only the oil of an air cooled engine.
- Mixture ratio 1:40 (2.5%).
- Oil of low quality and high oil/fuel ratio can decrease the lifetime of catalytic converters.
- Speak to your dealer when you select an oil.
- If Husqvarna two-stroke oil is not available, you can use another two-stroke oil of good quality that is intended for air cooled engines. Contact your dealer when you select oil.
- Do not use the two-stroke oil for water-cooled outboard engines. The two-stroke oil is sometimes referred to as outboard oil.

Gasoline, litre	Oil, litre
	2.5%(1:40)
5	0,125
10	0,25

Gasoline, litre	Oil, litre
15	0,375
20	0,50

### To make the fuel mixture

**Note:** Always use a clean fuel container when you mix the fuel.

**Note:** Do not make more than 30 days quantity of fuel mixture.

1. Add half of the gasoline quantity.
2. Add the full quantity of oil.
3. Shake the fuel mixture to mix the contents.
4. Add the remaining gasoline quantity.
5. Shake the fuel mixture to mix the contents.
6. Fill the fuel tank.

### To add fuel



**WARNING:** Do not smoke or put hot objects near fuel. Before you add fuel, stop the engine and let it cool for minutes.



**WARNING:** When you add fuel, open the fuel tank cap slowly to release unwanted pressure.



**WARNING:** After you add fuel, tighten the fuel tank cap carefully. Move the machine away from the refuelling area and the power before you start the engine.

- Always use a fuel container with an anti-spill valve.
- Make sure that the area near the fuel tank cap is clean. Contamination in the tank can cause operating problems.
- Shake the fuel container before you add the fuel mixture to the fuel tank.

### To start and stop

#### To examine before start

1. Examine the product for missing, damaged, loose or worn parts.
2. Examine the nuts, screws and bolts.
3. Examine the blades.

4. Examine the locknut. Make sure that the locknut has a minimum locking force of 1.5 Nm (1,1 ft lb). Torque the locknut to 35-50 Nm (26-36 ft lb).
5. Examine the air filter.
6. Examine the throttle trigger lockout and the throttle control.
7. Examine the stop switch.
8. Examine the product for fuel leaks.

### To start a cold engine



**WARNING:** Before you start the product, install the complete clutch cover and shaft. The loose clutch can cause injury. Use gloves.




**WARNING:** Move the product away from the refuelling area and the power. Put it on a flat surface. Make sure that no objects touch the cutting attachment.




**WARNING:** Make sure that no unauthorised persons are in the work area. Or it can cause a risk of dangerous injury. The safety distance is 15 m.

1. Put the stop switch to the start position.
2. Press the air purge ten times.

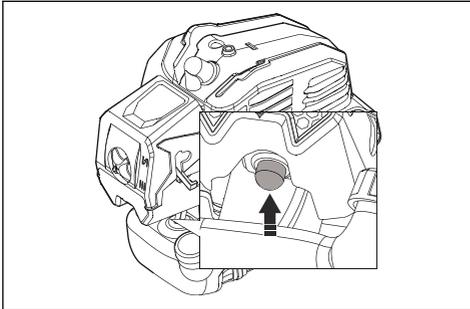

3. Move choke control to the choke position.

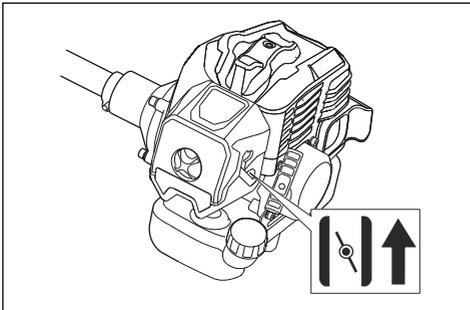

4. Hold the product to the ground. Pull out the cord slowly with your right hand until you feel some resistance. Pull the cord quickly and with force. Keep doing it until you hear the engine start.



**Note:** Do not twist the starter rope around your hand.



**CAUTION:** Do not pull all the starter rope out. Hold the starter rope handle when it is fully extended. Failure to obey these instructions can cause damage to the engine.


5. Set the choke control to the run position, then pull the start rope until the engine starts.
6. Pull the throttle trigger lightly and run at low speed for 60 seconds.



**WARNING:** Do not touch the cover. It can burn your skin and cause electrical shock if the spark plug cap is damaged. Do not use a product with damaged spark plug cap.

### To start a warm engine


1. Put the stop switch to the start position.
2. Press the air purge ten times.

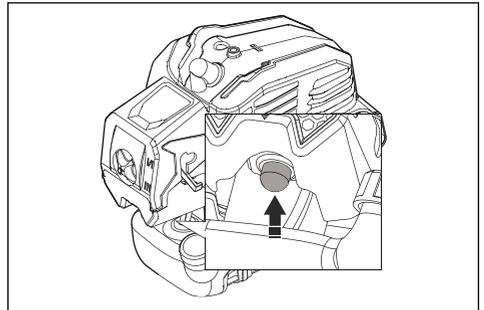

3. Set the choke control to the run position, then pull the start rope until the engine starts.

## To stop

- Push the stop switch to stop the engine.

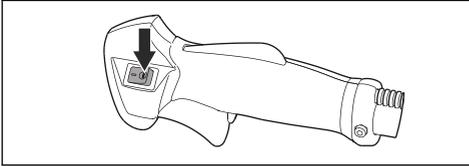

## To operate the grass trimmer



**CAUTION:** Make sure that you slow the engine to idle speed after each operation. A long period at full throttle without a load on the engine can cause damage to the engine.


**Note:** Clean the cover of the trimmer head when you attach a new trimmer line to prevent vibrations. Examine other parts of the trimmer head and clean if it is necessary.

## General work instructions




**WARNING:** Be careful when you cut a tree that is in tension. It can spring back to its normal position before or after the cut and hit you or the product, and cause injury.

- Clear an open space at one end of the work area, and start the work from there.
- Move in a regular pattern across the work area.

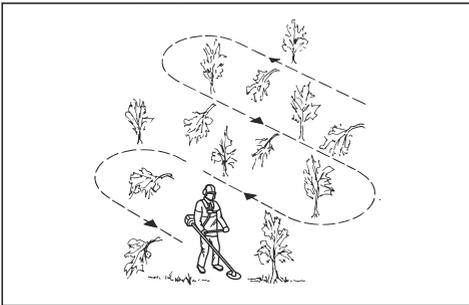

- Move the product fully to the left and right, to clear a width of 4–5 m (13–16 ft) on each turn.
- Clear a length of 75 m (250 ft) before you turn and go back. Move the fuel can along with you as you continue.
- Move in a direction where you do not go across ditches and obstacles more than necessary.


- Move in a direction where the wind makes the cut vegetation fall in the cleared area.

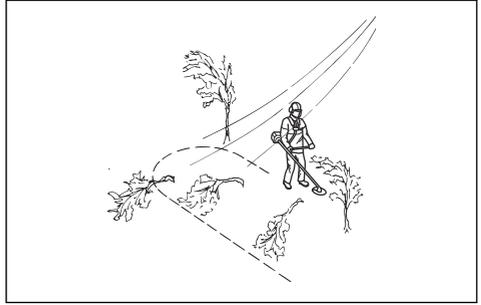

- Move along slopes, not up and down.

## To clear grass with a grass blade

1. Stand firmly with your feet apart.
2. Let the support cup rest lightly against the ground. Do this to protect the blade from hitting the ground.
3. Use a sideways swing movement from right to left to use the clear stroke and let the left side of the blade (between 8 and 12 o'clock) do the cutting.

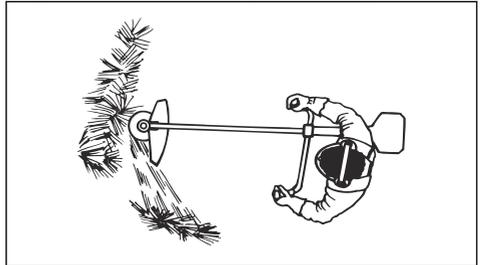


4. Angle the the blade to the left when you clear grass.

**Note:** The grass will collect in a line, which makes it easier to collect.

5. Use a sideways swing movement from left to right for the return stroke.
6. Do the work rhythmically.
7. Move forward and stand firmly again.
8. Stop the engine.
9. Remove the product from the clip on the harness.
10. Put the product on the ground.
11. Collect the cut material.

## To clear

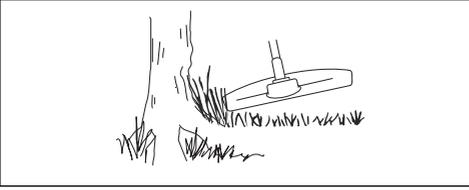


To achieve the best results::

- Hold the trimmer so that the trimmer head is just above the ground.
- Tilt the trimmer head at a slight angle.
- Let the end of the trimmer line strike the ground around objects


## To trim the grass

1. Hold the trimmer head immediately above the ground at an angle.

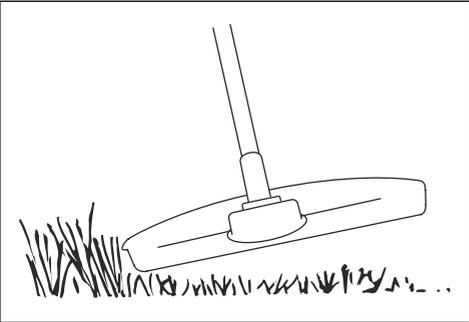


Do not push the grass trimmer line into the grass.

2. Decrease the length of the grass trimmer line by 10-12 cm (4-4.75 in) and decrease engine speed to decrease the risk of damage to plants.
3. Use 80 % throttle when you cut grass near objects.

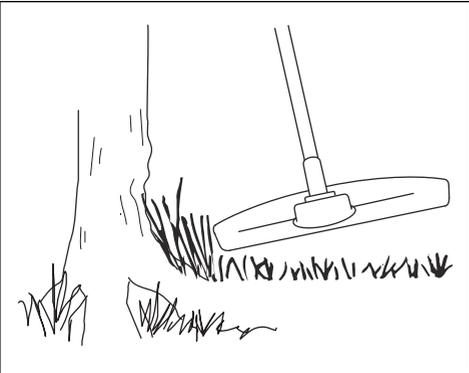


## To cut the grass

1. Make sure that the grass trimmer line is parallel to the ground when you cut.

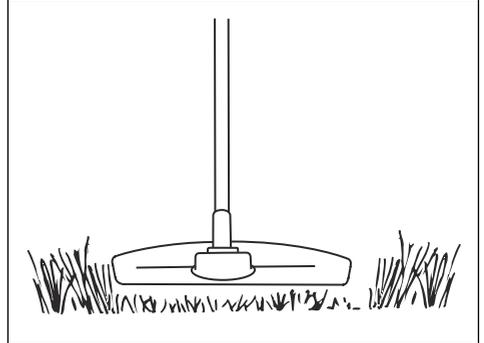

2. Do not push the trimmer head to the ground. The ground and the product can be damaged.
3. Do not let the trimmer head touch the ground continuously, it can cause damage to the trimmer head.
4. Use full throttle when you move the product from side to side to cut grass.

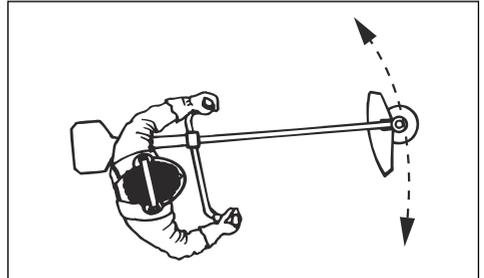


Make sure that the grass trimmer line is parallel to the ground.

## To use the sweeping technique

- The airflow from the rotating trimmer line can be used to remove cut grass from an area.
- For best results, apply full throttle.

- Keep the trimmer line parallel to and above the ground, and move the trimmer head from side to side.

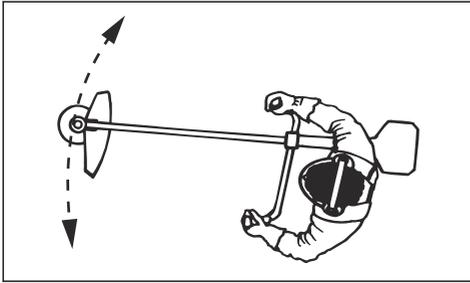

- Clean the trimmer head cover every time you refill the cord to avoid unbalance and vibrations in the handles. Also do a check of the other parts of the trimmer head and clean it if necessary.

## MAINTENANCE



**WARNING:** Read and understand the safety chapter before you clean, repair or do maintenance on the product.

product. The intervals are different if you do not use the product each day. Only do the maintenance work that is found in this manual. Speak to an approved service center about other maintenance work not found in this manual.

### Maintenance schedule

Make sure that you obey the maintenance schedule. The intervals are calculated from daily use of the

Maintenance schedule	Daily	Weekly	Monthly
Clean the external surfaces.	✓		
Clean the air filter. Replace if necessary.	✓		
Do a check of the harness.	✓		
Do a check of the throttle trigger lock and the throttle function.	✓		
Do a check of the handle and the handlebar.	✓		
Do a check of the stop switch.	✓		
Do a check of the guards.	✓		
Do a check of the blade that it is sharp and not damaged. Install the blade to the center position correctly.	✓		
Do a check of the trimmer head.	✓		
Do a check of the cutting attachment and make sure that it does not rotate at idle.	✓		
Do a check of the locknut of the cutting equipment.	✓		
Do a check of fuel leaks from the engine, tank or fuel lines.	✓		
Do a check of the transport guard for the blade.	✓		
Do a check of the nuts and screws.	✓		
Do a check of the starter rope handle and the starter rope.		✓	
Do a check of the vibration damping elementes.		✓	
Clean the external part and the adjacent areas of the carburettor.		✓	

Maintenance schedule	Daily	Weekly	Monthly
Clean the external part of the spark plug. Remove it and check the electrode gap. Adjust the distance to 0.6-0.7 mm or replace the spark plug. Install a suppressor to the spark plug.		✓	
Clean the cooling system.		✓	
Do a check of the bevel gear lubricant. Fill if necessary.		✓	
Clean the muffler.			✓
Do a check of the clutch, clutch springs and the clutch drum. Replace if necessary by an approved service center.			✓
Do a check of all cables and connections.			✓
Replace the spark plug.			✓


## To adjust the idle speed

- Make sure that the air filter is clean. The cutting attachment must not rotate in correct idle speed.
- Adjust the idle speed with the idle adjustment screw T which is identified with "T" mark.
- The idle speed is correct when the engine operates smoothly in all positions. The idle speed must be below the speed when the cutting attachment starts to turn.



**WARNING:** If you cannot adjust the idle speed and the cutting attachment stops, speak to the distributor or the service center. Do not use the product until it is correctly adjusted or repaired.


1. Turn the idle adjustment screw clockwise until the cutting attachment starts to turn.
2. Turn the idle adjustment screw counterclockwise until the cutting attachment stops.

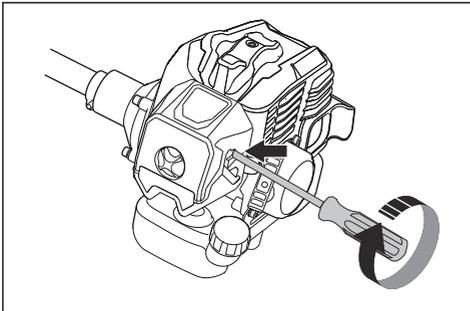

## Cooling system

The product has a cooling system to keep the work temperature low.

The cooling system has:

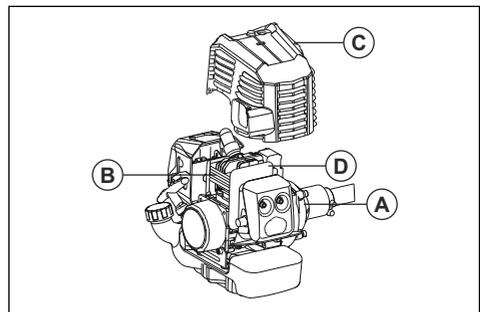

- Fins on the flywheel (A)
- Cooling fins on the cylinder (B)
- Cylinder cover (C) (directs cold air over the cylinder)
- Muffler plate (D)

## To clean the cooling system




**WARNING:** A dirty or blocked cooling system causes overheating. It causes damage to the piston and cylinder.

1. Clean the parts of the cooling system with a brush a minimum of one time a week.


## Air filter

- Clean the filter at intervals of 25 hours. Clean more regularly if necessary.
- Set the choke control in the choke position.

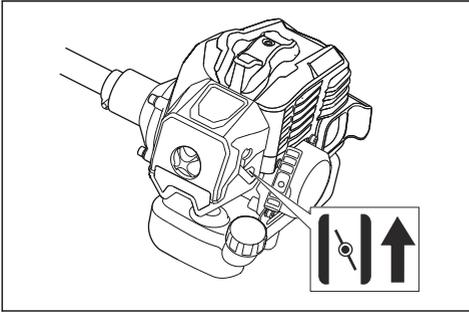


## Fuel filter

When the engine runs short of fuel supply, make sure that the fuel tank cap and the fuel filter (A) is not blocked.

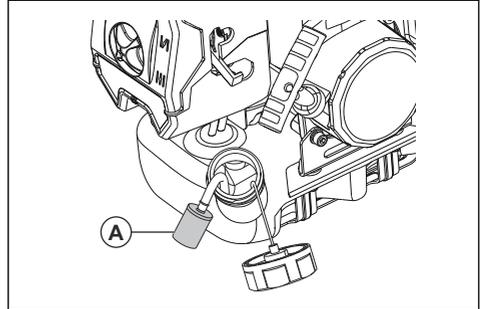

## To clean the air filter

1. Remove the air filter cover and remove the air filter.
2. Clean the foam plastic filter (A) with a warm solution of soap and water.

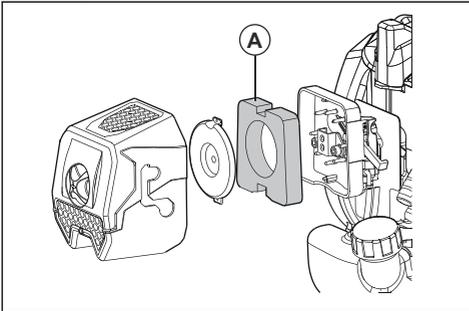

3. Make the foam plastic filter moist with the oil for Husqvarna two-stroke engine.

**Note:** Make sure that the filter is dry before you do this instruction.

4. Put the filter in a plastic bag. Add the oil to the plastic bag.
5. Push the plastic bag to make sure the oil supplies equally across the air filter.
6. Remove the unwanted oil from the plastic bag.
7. Get the air filter out. Dry it before you install it to the product.



**CAUTION:** Do not use oil for four-stroke engines. This causes damage to the foam plastic filter.




**CAUTION:** Do not use mixture fuel! It does not have sufficient oil, so the filter becomes dry in hours.

## Bevel gear

The bevel gear is filled with the right quantity of grease at the factory.


Before you use the product, make sure that the bevel gear is filled 3/4 full with bevel gear grease. Use Husqvarna special grease.

Usually, it is not necessary to replace the grease in the bevel gear. Replace if repairs are done.

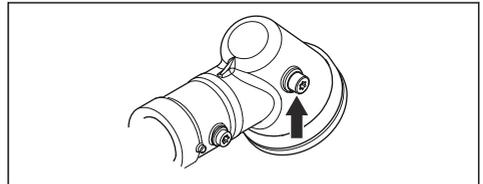

## To sharpen grass cutters and grass blades

1. Sharpen grass cutters and grass blades with a single-cut flat file.
2. Sharpen all edges of the grass cutters and blades equally to keep the balance.

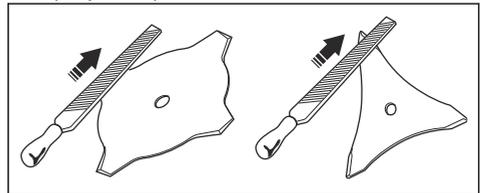

# TROUBLESHOOTING

## Starting failure

<b>Starting failure</b>		
<b>Check</b>	<b>Possible cause</b>	<b>Solution</b>
Stop button	Stop position	Set the stop switch to the start position.
Starter pawls	Binding pawls	Adjust or replace the pawls.
		Clean around the pawls.
		Speak to an approved servicing dealer.
Fuel tank	Incorrect fuel type.	Drain it and use correct fuel.
Carburettor	Adjustment of the idle speed.	Adjust the idle speed with the T-screw.
Spark (no spark)	Spark plug dirty or wet.	Make sure that the spark plug is dry and clean.
	Spark plug clearance incorrect.	Clean the spark plug. Check that the electrode gap is correct. Make sure that the spark plug is installed with a suppressor.
		Refer to technical data for correct electrode gap.
Spark plug	Spark plug loose.	Tighten the spark plug.

<b>Engine starts but does not stay running</b>		
<b>Check</b>	<b>Possible cause</b>	<b>Solution</b>
Fuel tank	Incorrect fuel type.	Drain it and use correct fuel.
Carburettor	Engine will not idle correctly.	Speak to your servicing dealer.
Air filter	Clogged air filter.	Clean the air filter.

---

## TRANSPORTATION AND STORAGE

---

- Keep equipment safe during transportation to prevent damage and accidents.
- Keep the product and equipment in a dry and frost-proof area.
- Clean the product.
- Replace or repair damaged components.
- Use the correct protective cover on the product that does not keep moisture.
- Keep the product tightly attached during transport.

---

## TECHNICAL DATA

---

	unit	131R
--	------	------


<b>Engine</b>		
Cylinder displacement	cm <sup>3</sup>	32,6
Cylinder bore	mm	36
Stroke	mm	32
Idling speed	rpm	3000±300
Maximum rotational frequency of the shaft	rpm	9600
Speed of output shaft	rpm	7100
Maximum engine output, according to ISO 8893	kW/rpm	0,9/7000
<b>Ignition system</b>		
Spark plug		NGK BPMR7A
Electrode gap	mm	0,6-0,7
<b>Fuel and lubrication system</b>		
Fuel tank capacity	cm <sup>3</sup>	900
<b>Weight</b>		
Weight without fuel, cutting attachment and harness	kg	7,0
<b>Noise emissions</b>		
Sound power level, measured - see note 1	dB(A)	111,9
Sound power level, guaranteed ( $L_{WA}$ ) - see note 1	dB(A)	115
<b>Noise levels</b>		
Sound pressure level at operator's ear, equipped with trimmer head - see note 2	dB(A)	93,6
Sound pressure level at operator's ear, equipped with grass blade - see note 2	dB(A)	92,4
<b>Vibration levels</b>		
Vibration levels ( $a_{hv,eq}$ ) at handles, equipped with trimmer head, left/right - see note 3	m/s <sup>2</sup>	5,56/6,94
Vibration levels ( $a_{hv,eq}$ ) at handles, equipped with grass blade, left/right - see note 3	m/s <sup>2</sup>	4,59/4,34
<p><b>Note 1:</b> Noise emissions in the environment measured as sound power (<math>L_{WA}</math>) in conformity with EC directive 2000/14/ EC. Reported sound power level for the machine has been measured with the original cutting attachment that gives the highest level. The difference between guaranteed and measured sound power is that the guaranteed sound power also includes dispersion in the measurement result and the variations between different machines of the same model according to Directive 2000/14/EC.</p> <p><b>Note 2:</b> Reported data for equivalent sound pressure level for the machine has a typical statistical dispersion (standard deviation) of 2.5 dB (A).</p> <p><b>Note 3:</b> Reported data for equivalent vibration level has a typical statistical dispersion (standard deviation) of 1.5 m/s<sup>2</sup>.</p>		

---

## ACCESSORIES

---

131R		
Approved accessories	Type	Cutting attachment guard
Grass blade/ grass cutter	Multi 255-3 (Ø 255 3 teeth)	593 70 66-01
	Grass 275-4 (Ø 275 4 teeth)	593 70 66-01
	Grass 255-4 1" (Ø 255 4 teeth)	593 70 66-01
Trimmer head	593707601	593 70 66-01
Support cup	Fixed	-

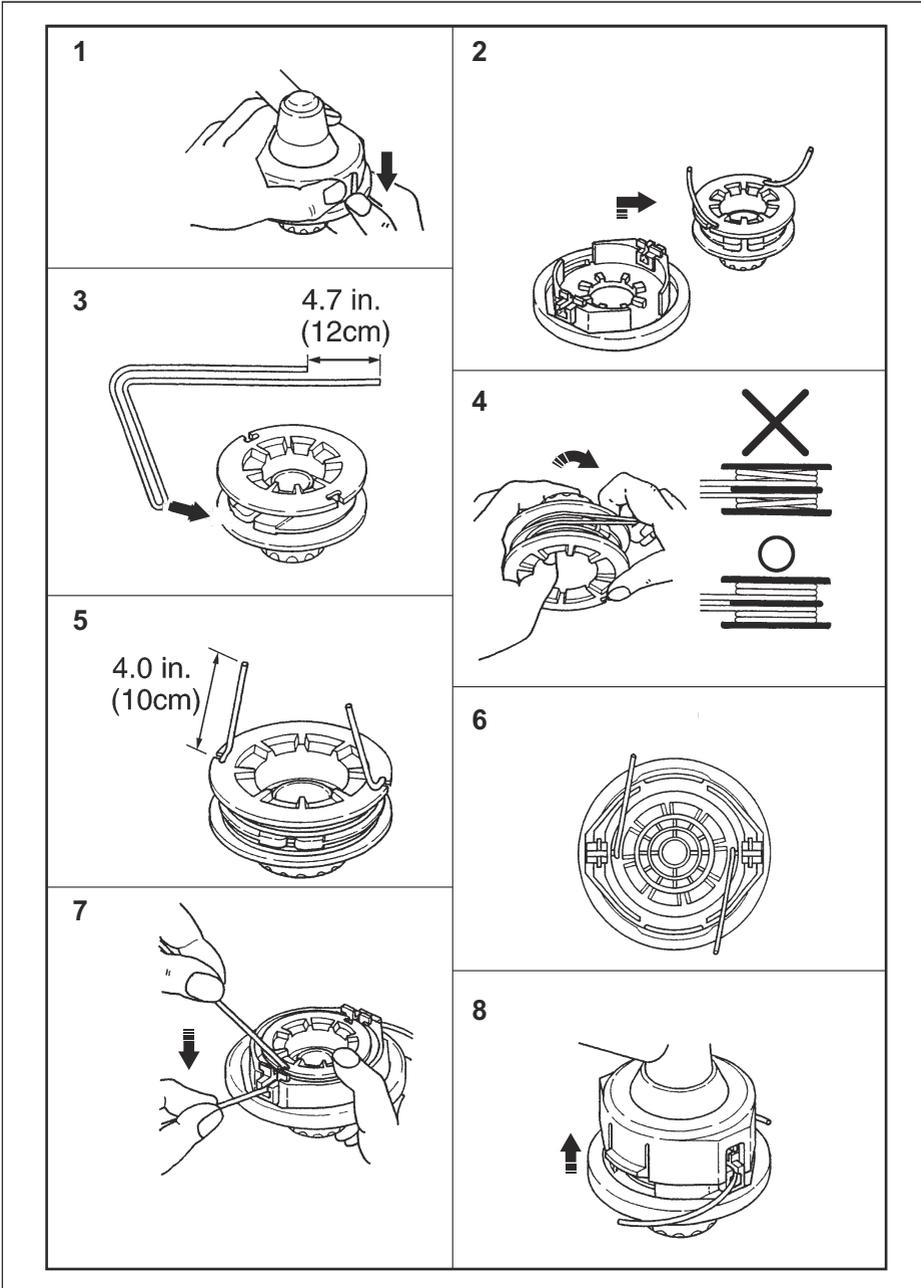





[www.husqvarna.com](http://www.husqvarna.com)

Original instructions

1159697-26



2018-05-25